

TECHNICAL SPECIFICATIONS

SOPIX²

PDF Compressor Free Version

Size 1

External dimensions.....25 x 39mm
Active surface area.....600mm² (20 x 30mm)
Number of pixels.....1.50million

SOPIX inside system

Technology.....CMOS + scintillator+ optic fiber
Pixel size.....20µm x 20µm
Theoretical resolution.....25lp/mm Real
resolution.....>12lp/mm Supplied
imaging software.....Sopro Imaging TWAIN
module.....Yes

SOPIX² USB connection

Connection.....USB 2.0 Total
cable length.....3.70m

Size 2

External dimensions.....31 x 42mm
Active surface area.....884mm² (26 x 34mm)
Number of pixels.....2.21millions

SOPIX²

Technology.....CMOS + scintillator + optic fiber
Pixel size.....20µm x 20µm
Theoretical resolution.....25lp/mm
Real resolution.....>18lp/mm
Supplied imaging software.....Sopro Imaging
TWAIN module.....Yes

SOPIX inside USB connection

Connection.....USB 2.0
Sensor cable length.....0.70m

PSPPIX²

System

Resolution..... 20 lp/mm
Scan Time (fast mode).....1,6s - 2,7s
Scan Time (high definition mode).....2,1s - 3,6s
Connection..... Ethernet RJ-45
Dimensions..... L. 154 x D. 204 x H. 193 mm
Weight.....2,6 kg
Operating voltage..... 100 - 240V ~ 50 - 60 Hz

Imaging Plates

Dimensions IP Size 0.....22 x 35 mm
Dimensions IP Size 1.....24 x 40 mm
Dimensions IP Size 2.....31 x 41 mm
Dimensions IP Size 3.....27 x 54 mm
Dimensions IP Size 4 (3 x IP Size 3).....69 x 54 mm

COMPUTER CONFIGURATION

Windows® minimum configuration required

Operating system.....Windows 7 SP1
Processor.....Core 2 Duo - 3GHz
RAM.....2 GB
Hard disk.....250 GB
Graphic card..... 512 MB RAM unshared memory
compatible DirectX 9
Screen resolution..... 1280 x 1024
Ethernet board..... 100 Mbps - 1 Gbps

MAC® minimum configuration required

Computer.....MacBook® Pro 13.3" or iMac® 21.5"
Operating system..... OS X Mavericks
Processor..... Intel® Core 2 Duo
RAM.....2 GB
Ethernet board.....1 Gbps

For Yosemite and El Capitan operating systems, a Mac computer from 2013 or later is required.

Windows® minimum configuration required

Operating system.....Windows 10
Processor.....Intel Core i5
RAM.....4 GB
Hard disk.....1 TB
Graphic card..... Chipset Nvidia® or ATI®
2 GB unshared memory compatible DirectX 9 or more
Screen resolution.....1280 x 1024 or more
Ethernet board.....1 Gbps

MAC® minimum configuration required

Computer..... iMac 27"
Operating system..... OS X El Capitan
Processor.....Intel Core i7
RAM.....4 GB
Ethernet board.....1 Gbps

Note: In the case of SOPIX inside and SOPIX2 inside, the IEC 60601-2-65 norm requires for each X-Ray intraoral system with an onboard digital sensor to use a square collimator.

Note: The data transfer from the intraoral system X-Mind unity to SOPRO® Imaging is not available on SOPRO® Imaging Mac version yet.


The medical devices for dental care SOPIX® Series are of class IIa and manufactured by SOPRO®, notified body LNE/GMED, X-Mind unity is of class IIb and manufactured by DE GOTZEN, notified body DNV - CE 0434. These medical devices are not refunded by health insurance organizations. Read carefully the instructions on the labelling before use.

The medical device for dental care PSPPIX® is of class IIa and manufactured by SOPRO® notified body LNE/GMED. This medical device is not refunded by health insurance organizations. Read carefully the instructions on the labelling before use.

PSPPIX® and SOPRO® are registered trademarks of SOPRO. "All other trademarks cited herein are the property of their respective owners"

124 Gaither Drive | Suite 140
Mount Laurel | NJ | 08054 | USA
Tel. 1-800-289-6367
Fax. 1-856-222-4726
www.acteongroup.com
info@acteonusa.com

MORE INVENTIVE LESS INVASIVE

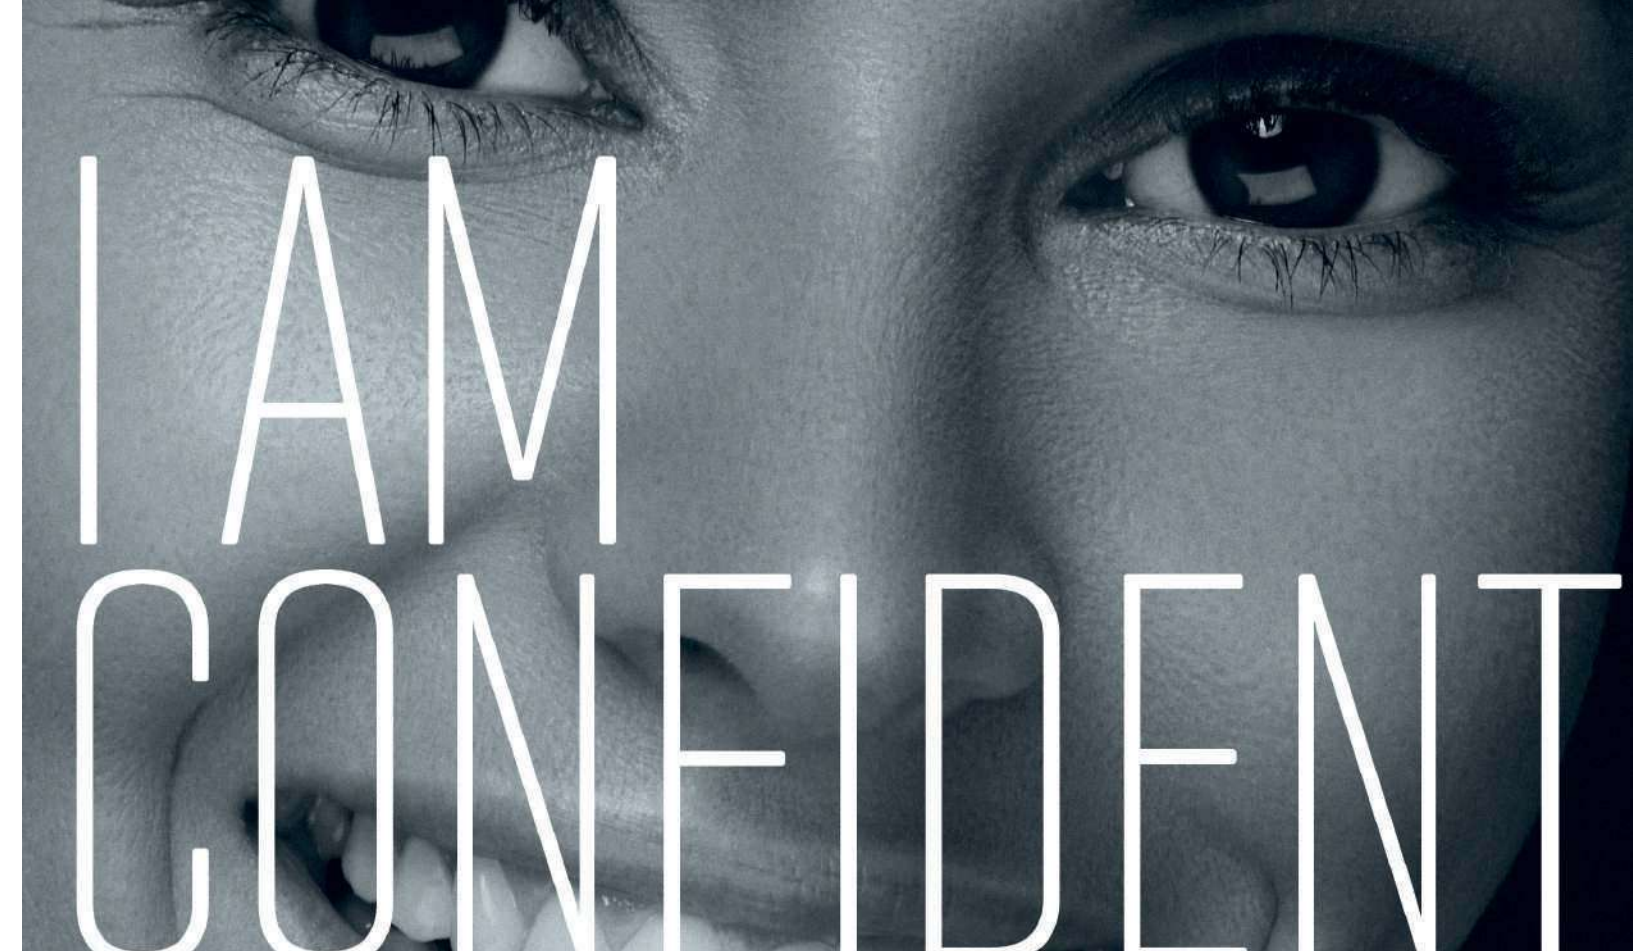

PSPPIX²

The cordless
imaging plate scanner



SOPIX²

A perfect image every time with
minimum exposure to radiation




Ace
technology




F0371 / JULY 2018

STRIKING CONTRAST FOR A MORE RELIABLE DIAGNOSIS

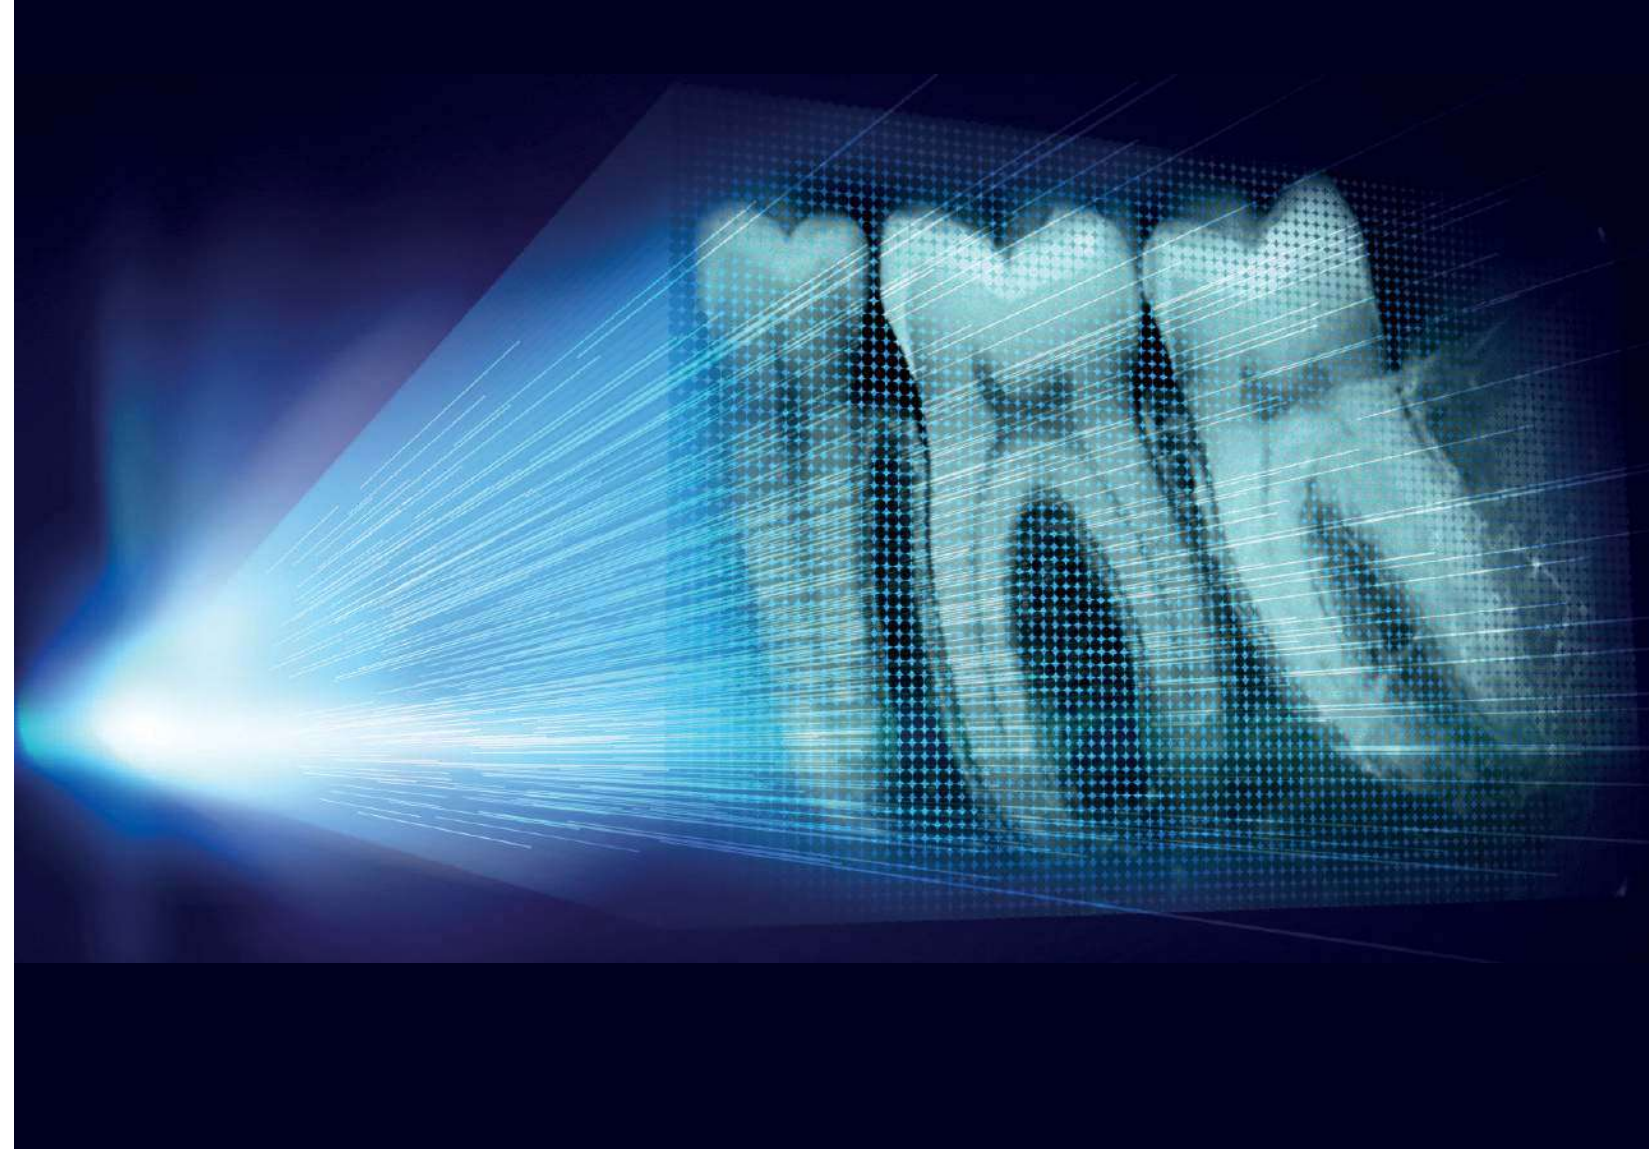

LEADING EDGE TECHNOLOGY

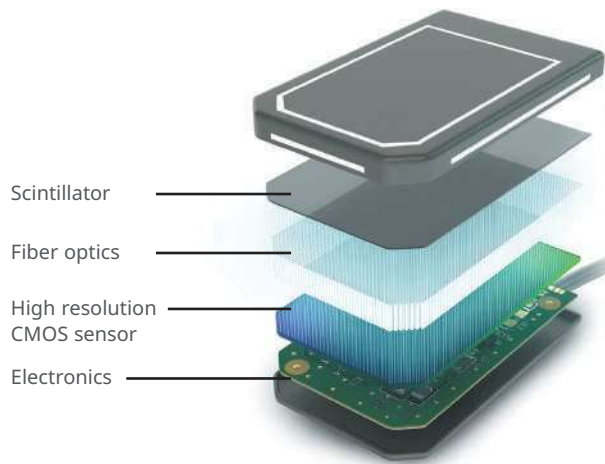


MORE INVENTIVE

Better differentiation of dental tissue


SOPIX® sensors surpass the limits of radiological examinations by offering **greater differentiation of dental tissue.**

This technological achievement is based on the use of **broad spectrum optical** microfibers for the guided transmission of photon emissions in order to provide **highly contrasted images.**

WITH FIBER

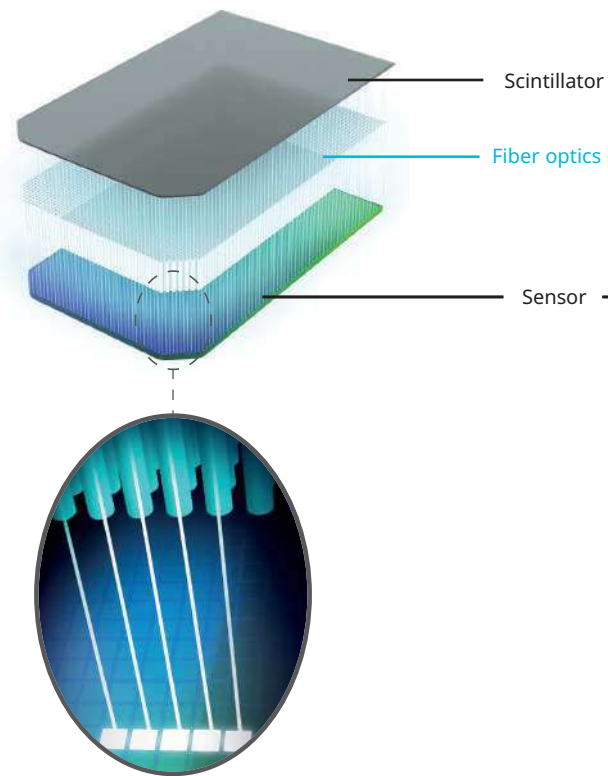

WITHOUT FIBER

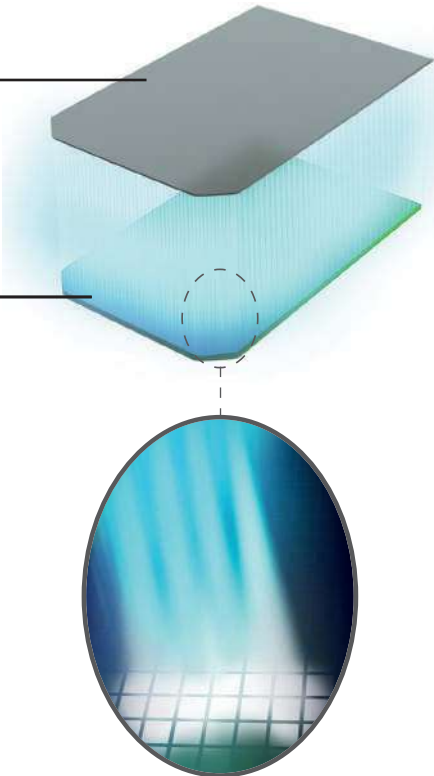

LESS INVASIVE

A more reliable diagnosis

The different tooth anatomic structures such as the bone, roots, pulp... are highlighted with **extreme precision** in the image.

Your diagnosis is **faster** and **more accurate!**



SOPIX²
A perfect image every time with
minimum exposure to radiation



Ace
technology

THE PERFECT FIT FOR YOUR CLINICAL PRACTICE

PDF Compressor Free Version

Endodontics



Pediatric



Cariology



HIGH-QUALITY IMAGES

SOPIX sensors provide **accurate images** and **striking contrast** to ensure a **reliable diagnosis**.

DESIGNED FOR YOUR PRACTICE

Two sizes are available depending on **patient morphology** and **clinical applications**.



Size 2



Size 1

Periodontics



Periapical




ACTEON^{suite} imaging




A QUALITY IMAGE VIA AN INTERFACE THAT IS SIMPLE, QUICK & INTUITIVE

The **ACTEON[®] Imaging Suite** software offers intuitive navigation with the mouse and advanced functionality. It alone lets you manage all of your images, from scanning to viewing images from all **ACTEON[®]** imaging devices (CBCT, Panoramic, intraoral digital X-ray system, intraoral camera, etc.) and much more.

Bitewing

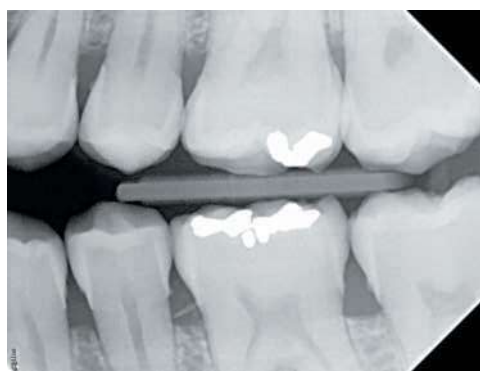

Implantology

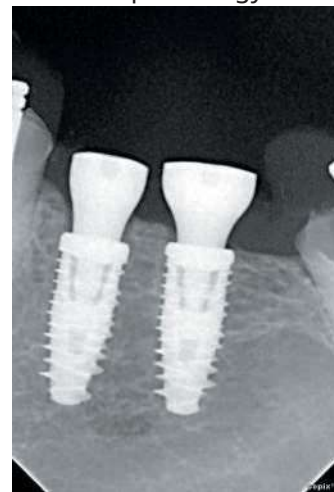

WINDOWS COMPATIBLE

MAC COMPATIBLE

A QUALITY IMAGE EVERY TIME WITH MINIMAL EXPOSURE TO RADIATION

PDF Compressor Free Version

CUTTING EDGE TECHNOLOGY



Laurent GUILHAUMON
R&D Project Manager,
HW/Embedded SW
Systems

Available in all **SOPIX** series sensors, patented **Ace** technology (**Automatic Control Exposure**) analyzes in real-time, the amount of X-rays accumulated by the sensor. It automatically freezes the image acquisition as soon as the sensor receives the radiation required to produce the perfect image.

Eliminate the risk of over exposing the image!

Combined with the **X-Mind unity** intraoral X-ray generator, **SOPIX[®] inside** with **ACE[®]** technology limits the emission of **x-rays** during the acquisition to the necessary amount for the patient's morphology. It uses the minimum dose required to provide a high-quality image.

"ACE is the combination of advanced sensor technology, digital power electronics and the know-how of two diagnostic imaging divisions. The synergy between La Ciotat (FRANCE) and Milan (ITALY) R&D teams gave birth to an innovative concept focused on patients, with outstanding image quality."




FOR A SAFER PROCESS

With **SOPIX** digital sensors and its patented **ACE[®]** technology, you acquire **successful X-rays every time**, meaning reliable and accurate diagnosis. You will save time by avoiding the need for retakes.

Using **X-Mind unity** intraoral X-ray generator with **SOPIX inside**, the patients receive the minimum dose required for their dental morphology. You protect your patients and your staff from any unnecessary radiation exposure.

ACTEON Imaging Suite records the **X-Mind unity** settings as well as the effective dose received by the patient. This ensures permanent traceability for every patient.

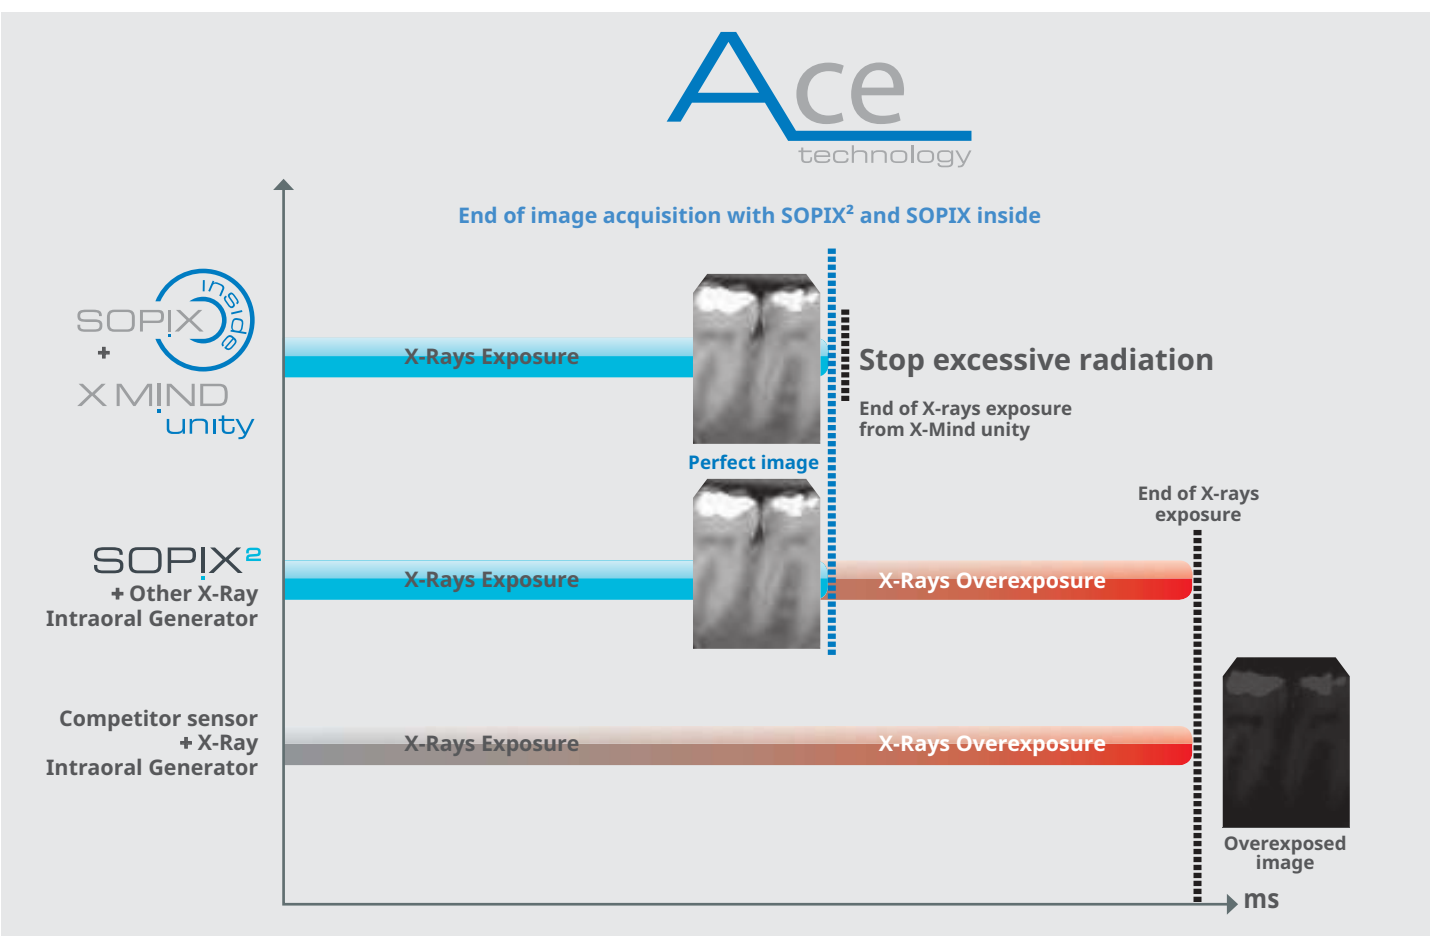

PATIENT AND STAFF

PROTECTION


PDF Compressor Free Version



ACTEON Imaging Suite, always one step ahead

ACTEON Imaging Suite systematically records the X-Mind unity settings as well as the effective dose received by the patient for each acquisition.

This ensures **permanent traceability** for every patient

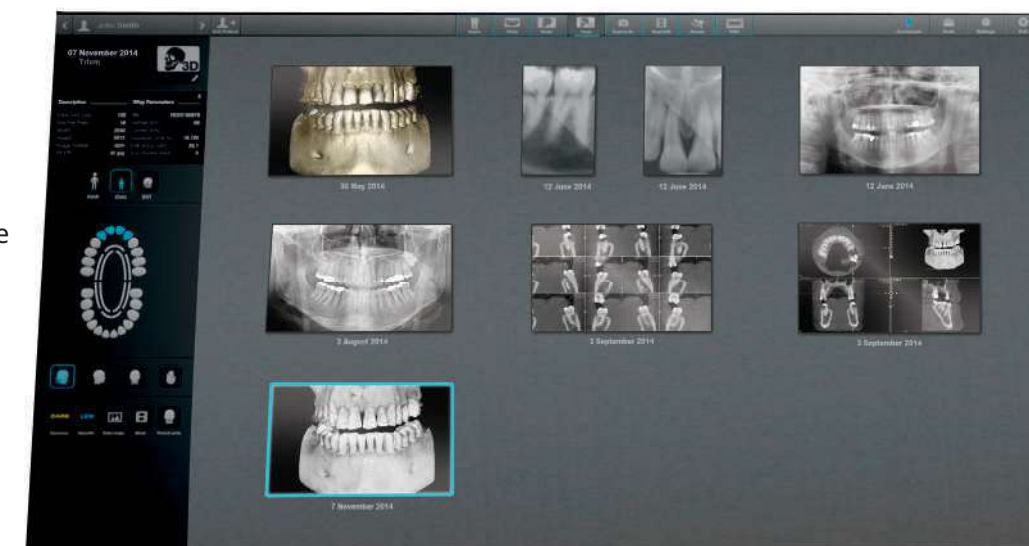

EXCLUSIVE TRACEABILITY



Outstanding working comfort

Through direct integration of **SOPIX inside** into X-Mind unity, connecting cables are hidden inside the X-ray unit.

The holder places the **sensor safely, within reach**, to prevent it from falling onto the floor.

Your working environment is **more ergonomic and productive**.



STOP EXCESSIVE RADIATION

Communication between the X-Mind unity and **SOPIX inside** sensor provides **unique benefits**.

When **SOPIX inside** has received enough energy to provide an **exceptional image quality**, it tells the X-Mind unity to **stop the X-ray emission**.

Effective protection for minimal exposure

The patient only receives the necessary dose adapted for their dental morphology, which **protects them from unnecessary overexposure**.

LOW DOSE




STRIKING CONTRAST

PSPiX²

FOR AN ACCURATE DIAGNOSIS

PDF Compressor Free Version

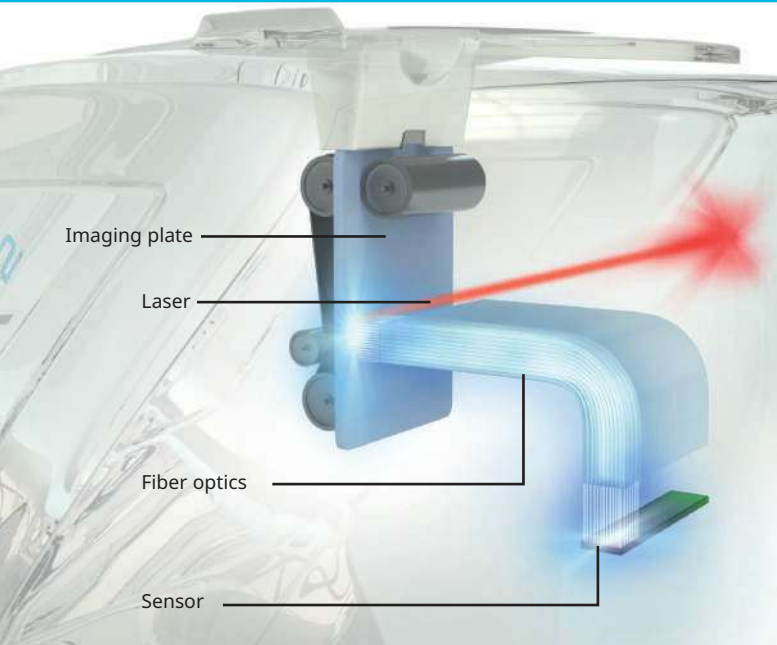


MORE INVENTIVE

Better differentiation of dental tissue

PSPiX² surpasses the limits of radiological examinations by offering **greater differentiation of dental tissue**.

This technological achievement is called **FIBER2PIXEL[®]**

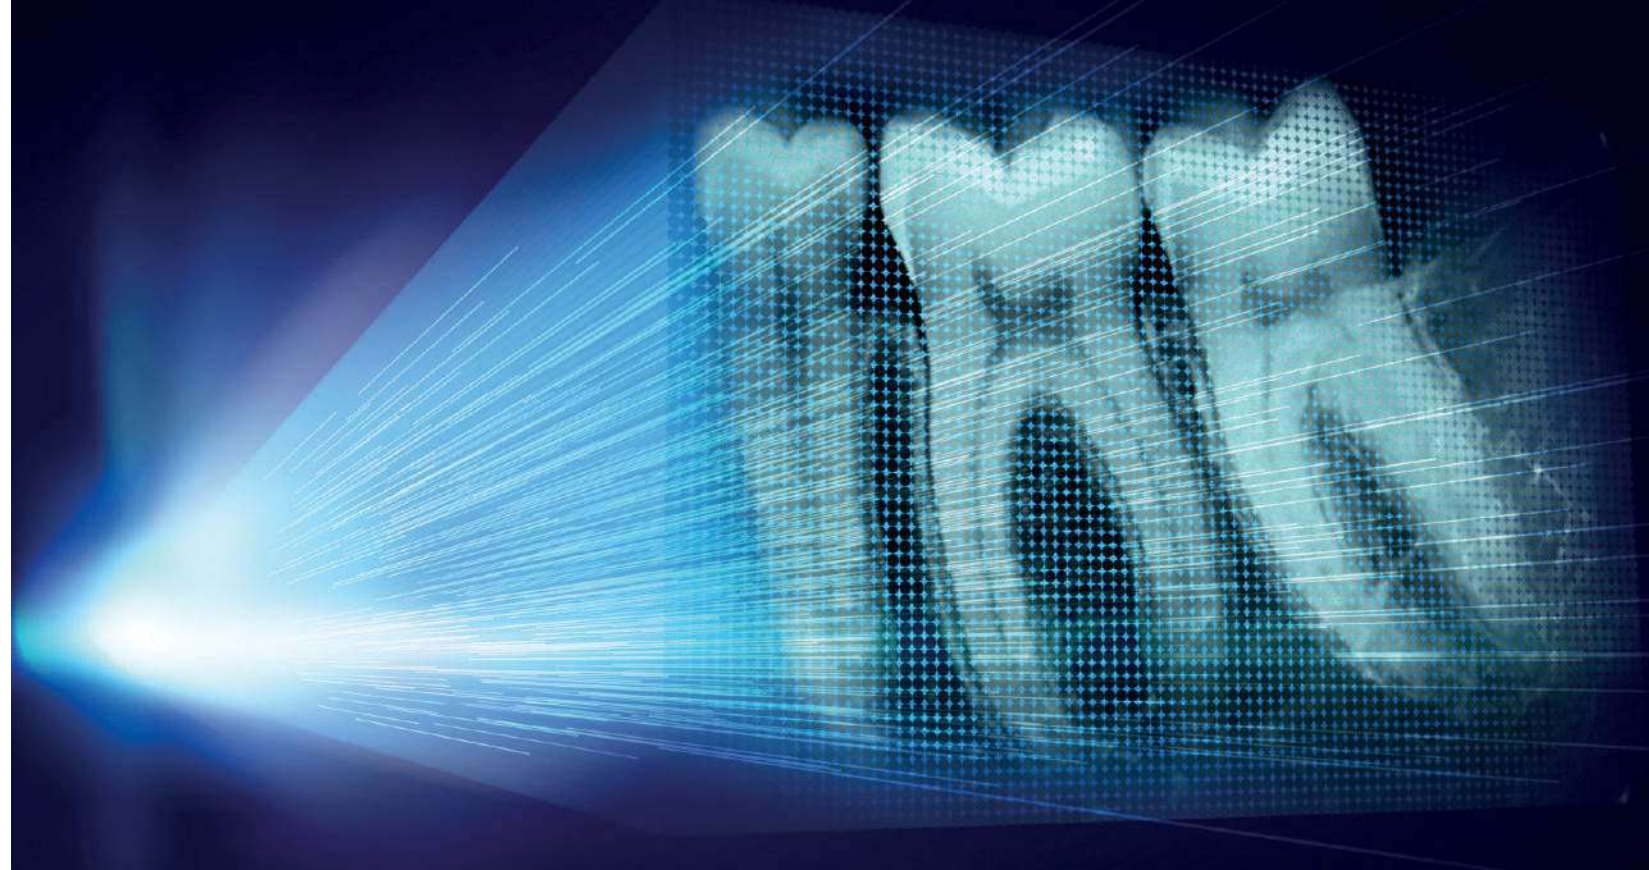


2 FIBER PIXEL

Differentiation of dental tissue

FIBER2PIXEL[®] technology is based on the use of **broad spectrum optical microfibers** for the guided transmission of photon emissions in order to provide **highly contrasted images**.

WITH FIBER - FIBER2PIXEL[®]

WITHOUT FIBRE

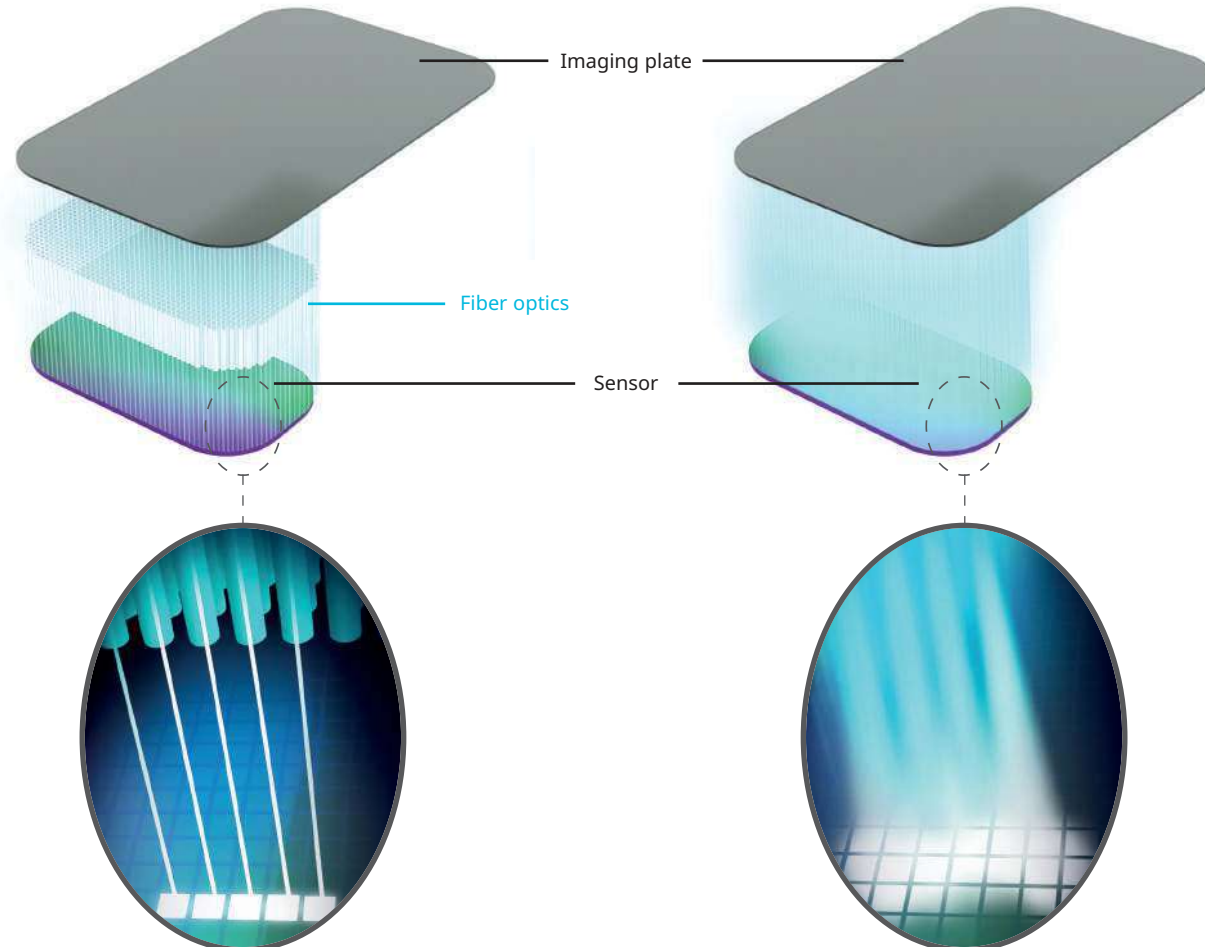

LESS INVASIVE

A more reliable diagnosis

The different tooth anatomic structures, such as the bone, roots, pulp... are highlighted with **extreme precision** on the image.

Your diagnosis is **faster** and **more accurate!**



PSPiX²



A SCANNER FOR MYSELF

PDF Compressor Free Version

The PSPIX² is

- SMALL** - compact size fits in any operatory
- INTUITIVE** - easy to learn and easier to use
- ELEGANT** - a perfect solution for digital imaging
- AFFORDABLE** - every chairside can be equipped for imaging

ACTEON INTRODUCES THE FIRST CORDLESS DIGITAL IMAGING SCANNER

SO SIMPLE, JUST SHOOT AND SCAN!

With **PSPIX²** chairside, your images are available in seconds. All without leaving the room or your patient.



I WANT A SIMPLER AND MORE INTUITIVE SCANNER

PDF Compressor Free Version

PSPIX² IS SO INTUITIVE, SCANNING AN IMAGE HAS NEVER BEEN EASIER

COMPACT SIZE

Created with cutting edge technology and design, the PSPIX² is the smallest and most compact PSP scanner on the market.

SO SIMPLE

The large color touchscreen provides simple instructions for quick and easy use.

REVOLUTIONARY DESIGN

With clean lines and an elegant design, the PSPIX² fits perfectly into any practice.

TRUE INTELLIGENCE

Workflow has never been so smooth and efficient, through its outstanding intellectual ability. A real evolution in your working practice!



7.5"

AUTOCLAVABLE

PSPIX² features optional removable parts for easy disinfection. The autoclavable parts further provide a high level of protection


ENHANCED IMAGE QUALITY

PSPIX² provides accurate, sharp and contrasted images to ensure reliable clinical diagnosis

Bitingwing




Implantology

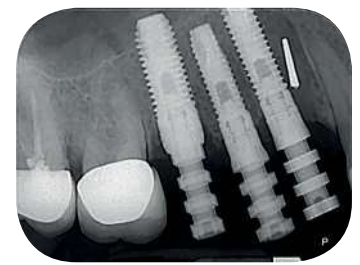

Cariology



Occlusal

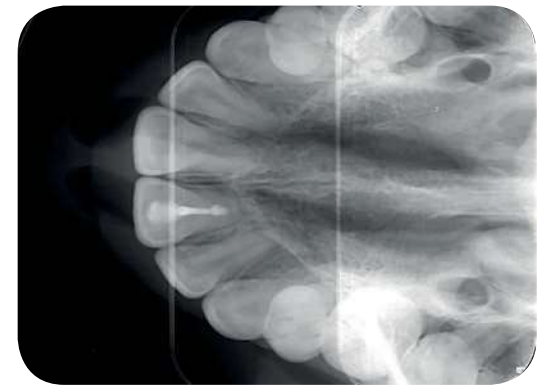

SOFTWARE CAPABILITIES

PSPIX² is delivered with ACTEON Imaging Suite software, which is easy to integrate and used by thousands

ACTEON Imaging Suite is compatible with MAC® and Windows® operating systems

WINDOWS
COMPATIBLE

MAC
COMPATIBLE




PDF Compressor Free Version

I CAN SCAN EVERY PATIENT

PSPIX² EXCEEDS YOUR TREATMENT EXPECTATIONS

PSPIX²

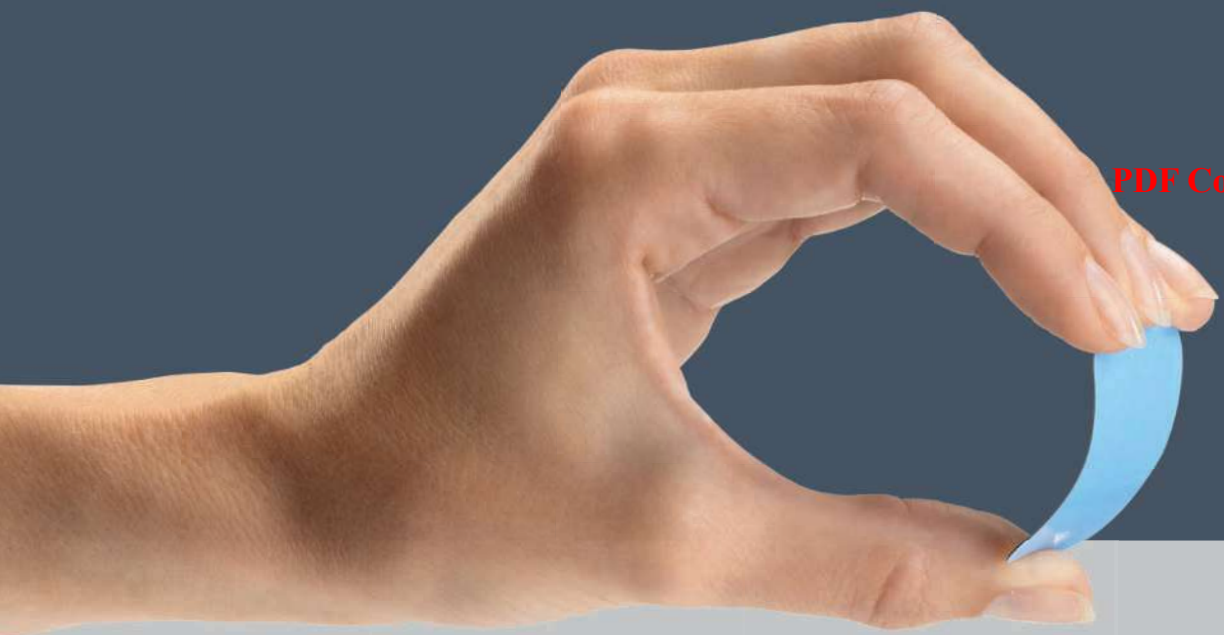

OUTSTANDING PATIENT COMFORT

With increased flexibility, the wireless **ACTEON** imaging plates provide greater comfort for all your patients.

- Ideal for both children and adults
- Imaging plates are available in sizes: 0, 1, 2, 3
- Endorsed by pediatric dentists worldwide



I CAN SHARE IT

PSPIX² IS ALSO DESIGNED FOR MULTIUSER ENVIRONMENTS



PDF Compressor Free Version

JUST CLICK AND SCAN!

With award winning **ACTEON Imaging Suite** software the **PSPIX²** can be shared across your operatories. Simply reserve the scanner or select your workstation on the touchscreen, insert your plate and let the **PSPIX²** do the rest... Images scan in seconds and are immediately available.

LET THE LIGHT GUIDE YOU...

Check the status of **PSPIX²** at a quick glance!



Blue: Available



Purple: Scanning



Yellow: Occupied

FULLY AUTOMATED PROCESS

- **AUTO-ACCESS** - door only opens when a plate is detected
- **AUTO-DETECT** - plate size is automatically detected
- **AUTO-SCAN** - **PSPIX²** scans and optimizes images before saving them into a patient record
- **AUTO-EJECT** - plates are automatically erased and ejected
- **ECO-MODE** - enters standby-mode to save power when not in use

